



HS

60 HZ STANDARD CAPACITY 4" SUBMERSIBLE PUMPS

Over 50 Years of Field Proven Design

FLOATING STACK DESIGN


Superior Sand Handling	Lexan® Diffuser
AISI 304SS Bowl	Noryl® Impeller

STRENGTH & DURABILITY

Glass reinforced discharge head and motor adapter provides 26% improvement in tensile strength

Permanently roll formed casing design tested to exceed the strength of Poly and PVC pipe

Excellent hardness and increased temperature performance

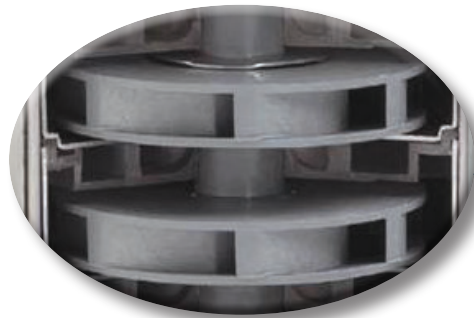

DESIGNED AND ASSEMBLED IN THE U.S.A.

100% Performance Tested


NSF/ANSI 61 Annex G • NSF/ANSI 372



EXTENDED RANGE TO 25 GPM – AVAILABLE IN 1 AND 1½ HP

WATER END DATA

Model	Order Number	Required HP	Stages	Weight (lbs)	Length (in)
5HS	5HS05	½	12	5.5	15.3
	5HS07	¾	15	6.5	17.3
	5HS10	1	20	8.1	20.8
7HS	7HS05	½	10	4.9	14.1
	7HS07	¾	13	5.9	16.3
	7HS10	1	17	7.2	19.1
10HS	10HS05	½	7	3.9	11.8
	10HS07	¾	10	4.9	13.9
	10HS10	1	12	5.5	15.3
	10HS15	1½	17	7.2	18.7
18HS	18HS07	¾	6	3.8	12.1
	18HS10	1	8	4.5	13.8
	18HS15	1½	11	5.6	16.4
25HS	25HS10	1	7	4.3	13.6
	25HS15	1½	9	5.1	15.4

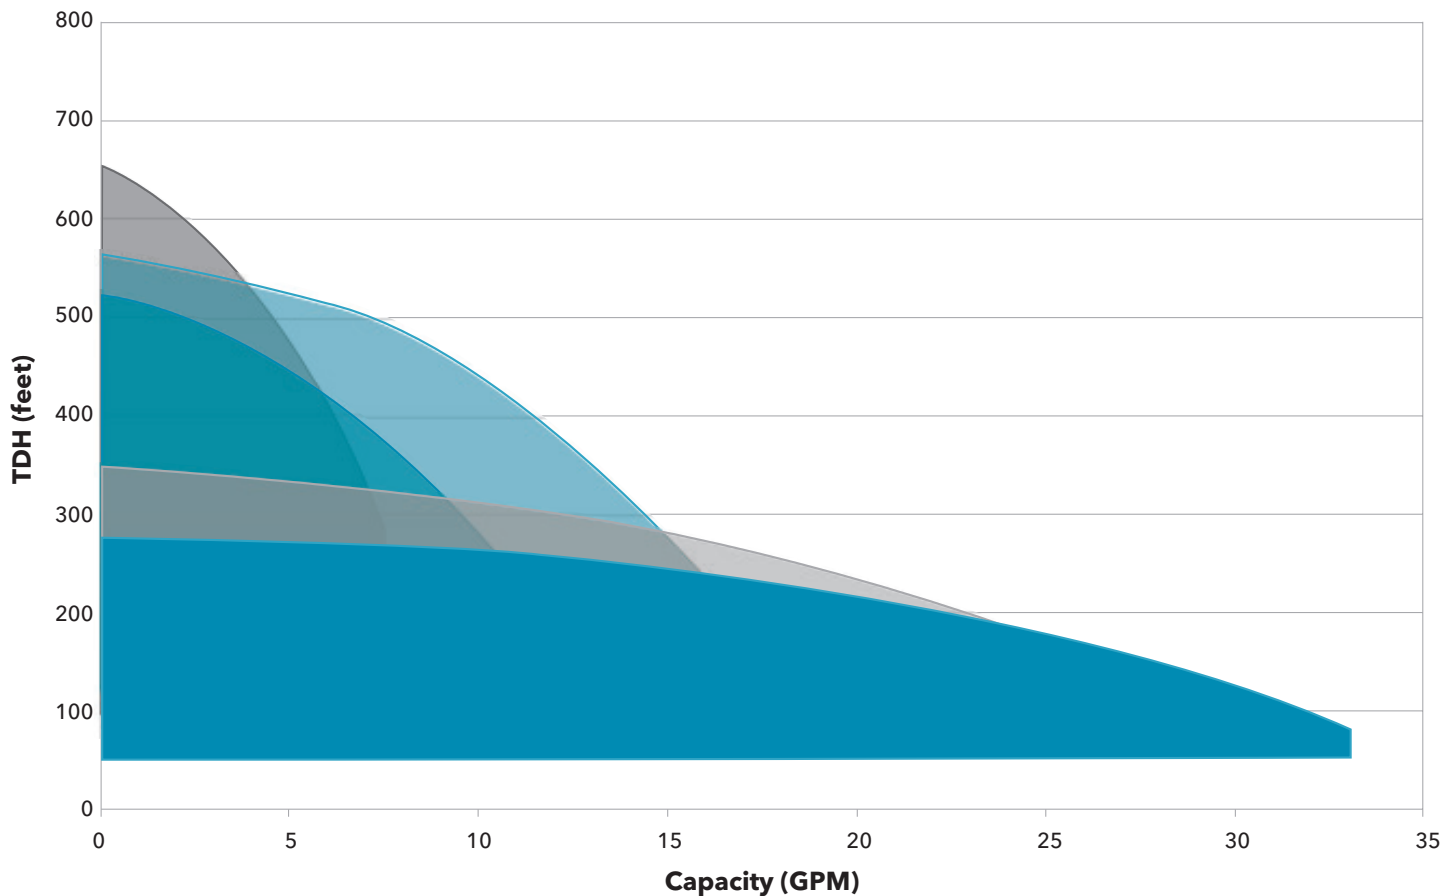

Xylem Inc.
 2881 East Bayard Street Ext., Seneca Falls, NY 13148
 Phone: (866) 325-4210 • Fax: (888) 322-5877
www.gouldswatertechnology.com

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
 CentriPro is a trademark of Xylem Inc. or one of its subsidiaries.
 Noryl and Lexan are trademarks of GE Plastic.
 © 2013 Xylem Inc. HSSALES R1 July 2014